




PRODUCT CONCEPT
 ENGINEERING
 PRODUCTION
 DISTRIBUTION

GTtrading
 CAR & HOME AUDIO HI-FI EQUIPMENT

Impedance vs Freq

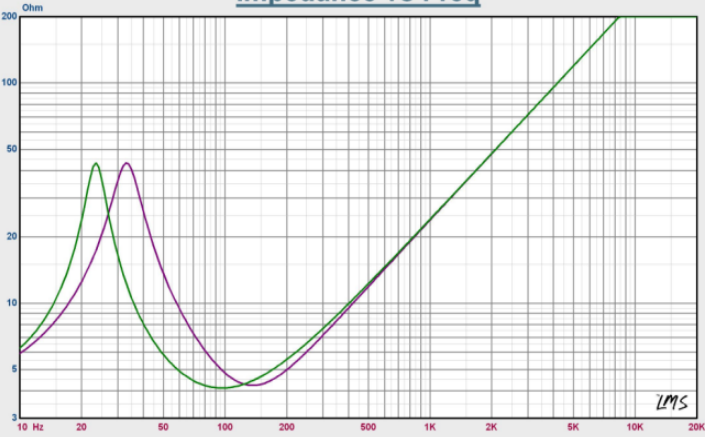

Map

- 21: SpkrModel: ASX12 Series
- 22: DeltaModel: ASX12 Series

Notes

Revc=4.600 Ohm Levcs=3.803 mH Fc=33.226 Hz Sd=47.144m M7Md=370.000 g
 BL=28.783 T/B Qms=1.437 Qes=0.349 Qts=0.317 Nom=0.189 % SPL=85.0 dB
 Vas=19.529m M7 Cms=61.679u MN
 Mms=370.785 g Mmd=364.909m Kg

LMS 4.6.0.371 5/1-30-2007


Person:
Company:

Project:
File: ASX_SERIES.lib

Apr 6, 2023
Thr 7:18 pm

LINEAR X SYSTEMS

Impedance vs Freq

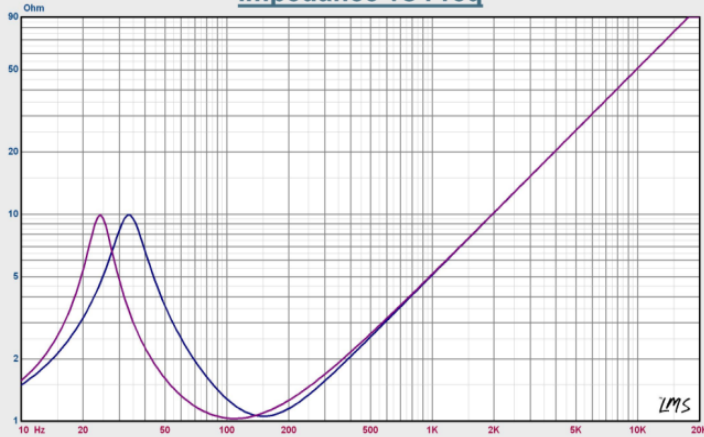

Map

- 25: SpkrModel: ASX12 Parallel
- 26: DeltaModel: ASX12 Parallel

Notes

Revc=1.000 Ohm Levcs=811.141m mH Fc=33.490 Hz Sd=47.144m M7Md=370.000 g
 BL=15.932 T/B Qms=3.018 Qes=0.337 Qts=0.303 Nom=0.189 % SPL=84.8 dB
 Vas=17.521m M7 Cms=55.515u MN
 Mms=406.813 g Mmd=400.927m Kg

LMS 4.6.0.371 5/1-30-2007

Person:
Company:

Project:
File: ASX_SERIES.lib

Apr 6, 2023
Thr 7:18 pm

LINEAR X SYSTEMS