

SFF3 MIDRANGE

Gttrading保留对所示产品进行修改或改进的权利，恕不另行通知 - 所示产品的可用性可能会有所更改 - 本用户指南中描述的产品仅代表可用STEG产品的一部分 - 提及的所有品牌和商标 仅用于描述目的，所有权利归属于所有者 - 禁止全部或部分复制本用户指南。

G.T.trading reserves the right to make modifications or improvements to the products illustrated without notice thereof - The availability of the products illustrated is subject to change - The products described in this User's Guide represent just a part of the STEG products available - All brands and trademarks mentioned have been used exclusively for description purposes and all rights belong to the respective owners - Total or partial reproduction of this User's Guide

Gttrading si riserva il diritto apportare modifiche o miglioramenti ai prodotti illustrati senza preavviso - la disponibilità di posti dei prodotti illustrati sono soggette a modifica - I prodotti descritti in questo manuale d'uso rappresentano solo una parte dei prodotti STEG disponibili - Tutti i marchi e marchi registrati citati sono stati utilizzati esclusivamente a fini di descrizione e tutti i diritti belong al rispettivo riproduzione proprietari - totale o parziale di questo manuale d'uso è vietato.


用户指南

USER'S GUIDE

Performance Speaker Series

MANUALE D'USO

Serie di diffusori ad alte prestazioni

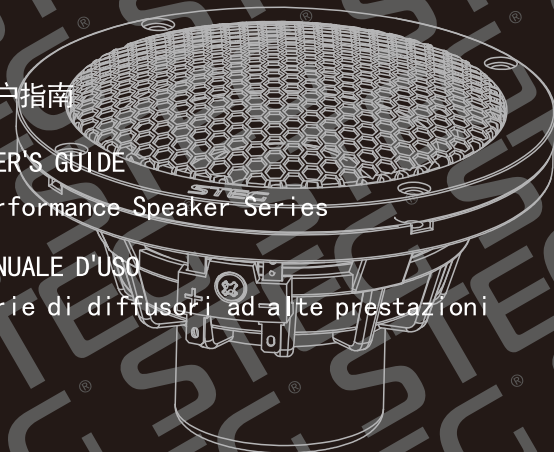

product concept
engineering
production
distribution

GTtrading
CAR & HOME AUDIO HI-FI EQUIPMENT

ITALY
www.gt-trading.it
info@gt-trading.it




- ▶ 长时间在大音量下聆听音乐可能会损害您的听觉，并影响您的驾驶安全。
- ▶ Listening to high sound pressure levels over a prolonged period of time may harm your hearing.
- ▶ L'ascolto ad alto volume per lunghi periodi di tempo può danneggiare l'udito.

主要特点：


- 透气铝压铸盆架
- 高性能钕铁硼
- CNC精加工磁路部件
- 特制胶边加纸胴体鼓纸
- 25.5mm耐高温音圈
- 低干扰细杆径保护网

安装方式：

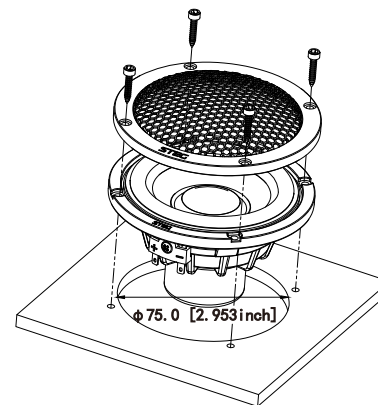

SFF3 技术参数：


阻抗 (Ω)	4 Ω
频率响应 (Hz)	125-15000 Hz
持续功率 (W)	30 W
灵敏度 (2.83V/1M)	87 dB
Qms	1.584
Qes	0.531
Qts	0.397
Mms (g)	2.007
Vas (Ltr)	1.085
磁路类型	钕铁硼
安装直径 (mm)	75.0
安装深度 (mm)	49.0

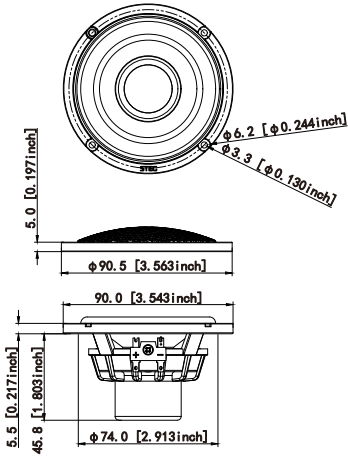

Key Features：


- Vented die cast aluminum chassis
- Customized rubber surround with paper cone
- High grade Neodymium magnet
- 1 inch high efficiency voice coil
- CNC finishing motor metal parts
- Low-interference protective grill

SFF3 Installation：

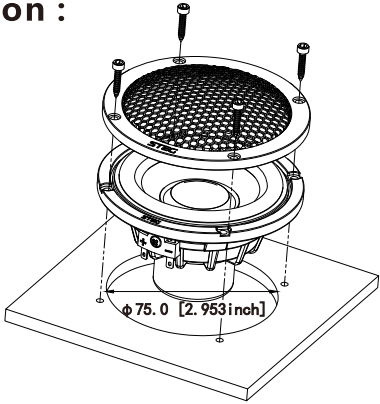

SFF3 Technical Parameters :


Impedance (Ω)	4 Ω
Frequency Response (Hz)	125-15000Hz
Rated Power (W)	30 W
Sensitivity (2.83V/1M)	87 dB
Qms	1.584
Qes	0.531
Qts	0.397
Mms (g)	2.007
Vas (Ltr)	1.085
Magnet	NdFeB
Mounting Diameter	75.0
Mounting Depth	49.0

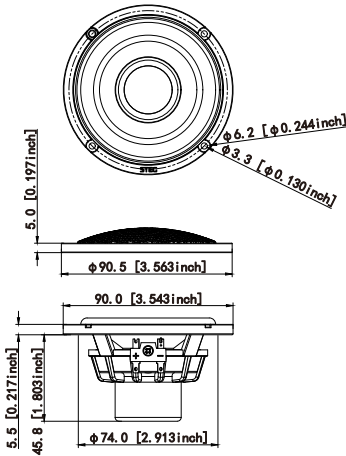

Caratteristiche principali :



- Telaio ventilato in alluminio pressofuso
- Bordo in gomma speciale con cono in carta
- Magneti NdFeB ad alte prestazioni
- Bobina mobile efficienza da 1 pollice
- Giogo a T lavorato con precisione CNC
- Griglia protettiva a bassa interferenza

Installazione di SFF3 :

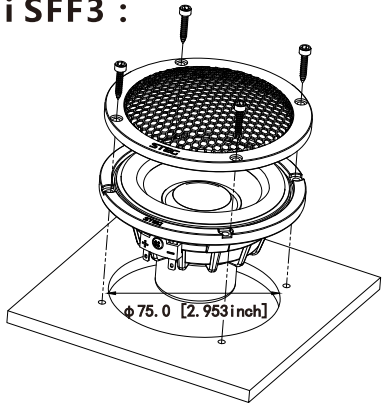

Parametri tecnici del SFF3 :

Impedenza (Ω)	4 Ω
Risposta in frequenza (Hz)	125-15000Hz
Potenza nominale (W)	30 W
Sensibilità (2.83V/1M)	87 dB
Qms	1.584
Qes	0.531
Qts	0.397
Mms (g)	2.007
Vas (Ltr)	1.085
Tipo di magnete	NdFeB
Diametro di montaggio (MM)	75.0
Profondità di installazione (MM)	49.0

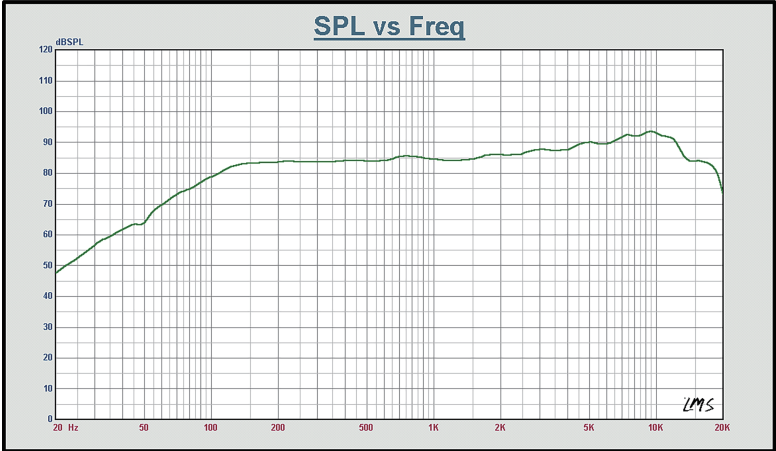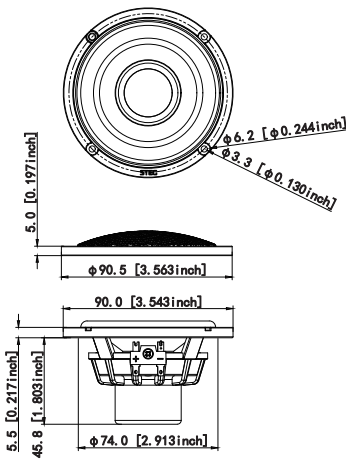

- 感谢您的查阅！
- Welcome to consult !
- Benvenuti a consultare !