



OWNERS MANUAL

Subwoofer with Enclosure

AS12

INSTRUCTIONS

Congratulations on purchasing AUDIOSYSTEM subwoofer with enclosure. Please read this manual in order to fully understand how to get the best results from this product and ensure that all advice on how to install and look after the product is followed.

Thanks a lot for your purchasing! we hope you enjoy listening to your product as much as we enjoyed creating it.


The following instructions should be used as a general guideline only. If you are unsure about performing any of the procedures listed below, please consult with the professional car audio installation store.

Before installing the product, please follow these Instructions:

- 1, Be sure to carefully read and understand the instructions before attempting to install this product.
- 2, For safety, disconnect the negative terminal from the battery before starting the installation.
- 3, Use the highest quality connectors for a reliable installation and to minimize signal or power loss.
- 4, Please use Caution before you drill or cut! Be careful not to cut or drill into gas tanks, fuel lines, brake or hydraulic lines, vacuum lines or electrical wiring when working on any vehicle.
- 5, Never run wires underneath your vehicle. Running wires inside the vehicle provides the best protection from exhaust heat and environmental elements.
- 6, Avoid running wires over, near or through sharp edged surface. Use rubber grommets to protect any wires routed through metal.
- 7, When running cable from amplifier, avoid running it near sources of high current (i.e. wiring harnesses, battery cables)


Connection Guidelines

For safety, make sure that the positive and negative connections are correct.
Connect AS12 to an amplifier as shown in the connection instruction bellow:

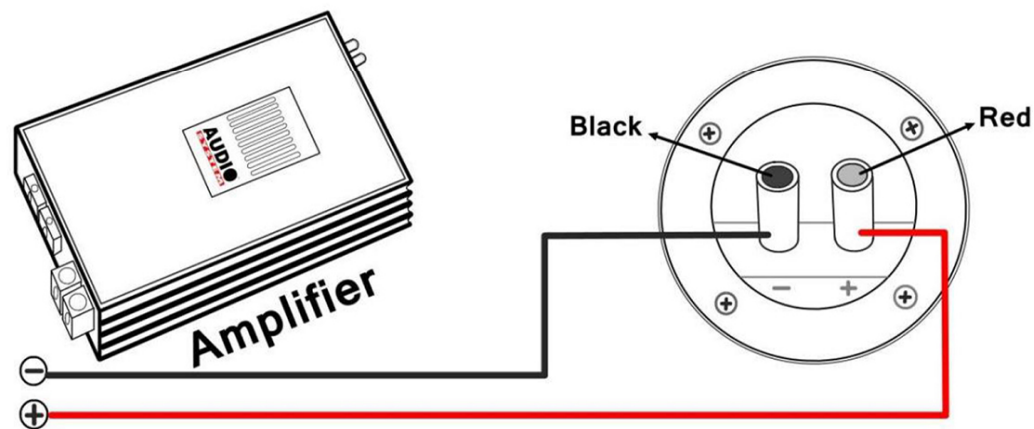

Dimension Diagram

This diagram is to be used with the dimensions listed below to provide the measurements for mounting the unit. Design and specifications are subject to change without notice.

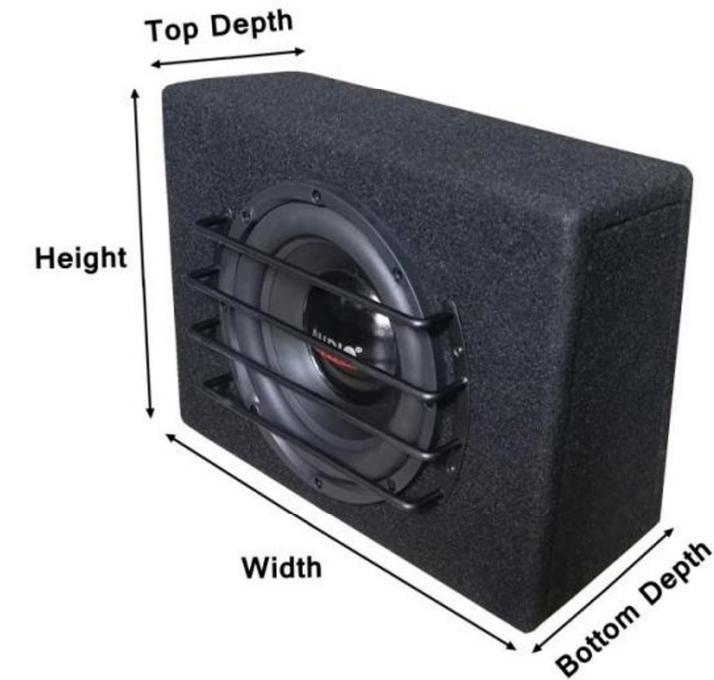

Dimensions:

Height: 380 mm
Width: 460mm
Top Depth: 190mm
Bottom Depth: 260mm

Specifications:

Subwoofer Size: 12"
Frequency Response: 50Hz--600Hz
Nominal Impedance: 4 Ohm
RMS Power: 400W
Max Power: 600W
Sensitivity: 95db